

7 Inch IP Kit



VTO6210BW



VTH1560BW

Features

- 7" color TFT-LCD capacitive touch screen
- Cat 5e system, easy installation
- Support monitoring, video talk, unlock function
- Compatible to up to 8 security sensors (burglar, fire, gas leakage, etc)
- Color 1MP CMOS night vision camera
- Support IC card opening
- Intercom between all indoor monitors
- Picture capture, video record for visitors
- Support 32 channel IP camera surveillance

Specifications


Mode		VTO6210BW
System	Main Processor	Embedded micro processor
	Operation System	Embedded LINUX OS
Video	Video Compression Standard	H.264
	Input/Approaching Induction	1MP CMOS HP camera
	Black Light	Support
Audio	Audio Input	All-direction Microphone
	Audio Output	Built-in speaker
	Bidirectional Talk	Support dual-way bidirectional talk
Operation	Input	Digital keyboard

VTKB-VTO6210BW-VTH1560BW

Mode	Card	Built-in IC card induction reader
Alarm and Access Control	Vandal proof	Support
	Access control	Support by expansion mode
Network	Ethernet	10M/100Mbps Self-adaptive
	Network Protocol	TCP/IP,SNMP,MDI/MDI-X Self-adaptive
Storage	Memory	128MB
Others	Power	DC 10~15V
	Power Consumption	Standby $\leq 1W$, work $\leq 5W$
	Working Environments	-10℃ – +55℃
	Water Proof	IP65
	Dimensions	154.2mm*114.2mm*43.0mm (L*W*T) ;
	Weight	0.6Kg;

Model		VTH1560BW
System	Main Processor	Built-in microcontroller
	Operation System	Embedded LINUX operating system
Video	compression	H.264
	Resolution	800*480
Audio	Audio Input	All-direction microphone
	Audio Output	Embedded loudspeaker
	Bidirectional Talk	Support bidirectional talk
Display	Size	Color 7-inch TFT LCD
Operating modes	input	Mechanical keys(emergency, protection, video talk, monitoring, unlock), Touch screen technology
Alarm	Alarm input	Support 8 channels input
Network	Ethernet	10 M / 100 Mbps adaptive
	network protocol	TCP/IP
General	Power	DC 10~15V or supply directly by Special switching power
	Power Consumption	Standby $\leq 1.5W$, work $\leq 7W$
	work environment	Temperature: -10℃~+60℃
		Humidity: 10~90%RH
	Dimensions	221.2mm×154.3mm×24.2mm (L*W*T) ;
	Weight	0.8Kg;

Application

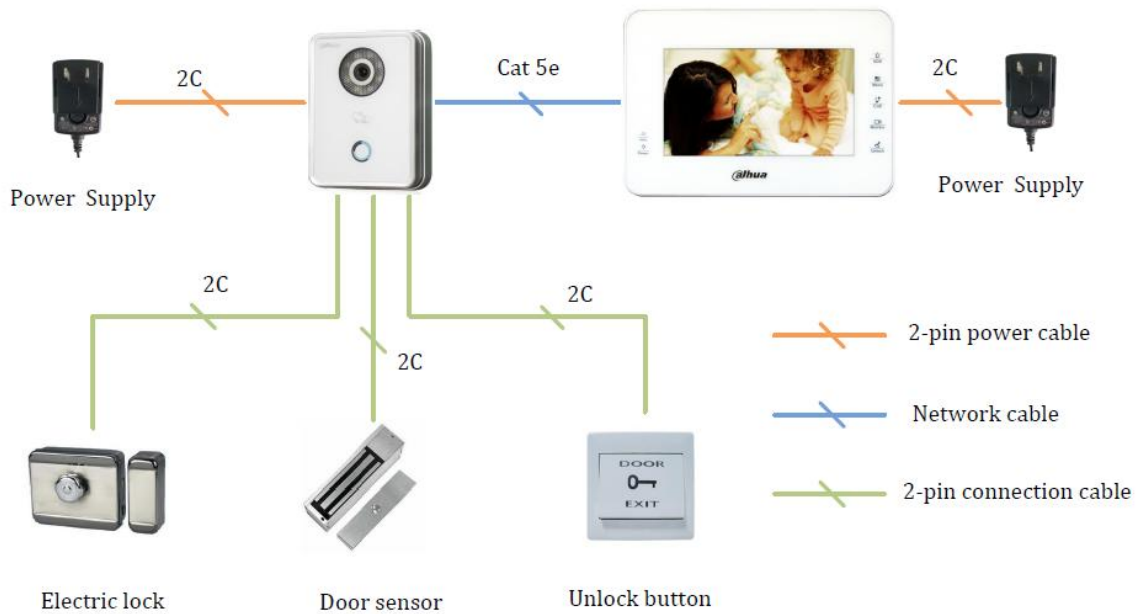

Dahua Technology Co., Ltd.

1199BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuatech.com

*Design and specifications are subject to change without notice.